

MOROOKA EUROPE




MST-2200VDR

**Full Rotating
Rubber Crawler Carrier**

Max Payload 11T.

**CARRIER for SOFT, SANDY and
ROUGH TERRAIN**

MST-2200VDR

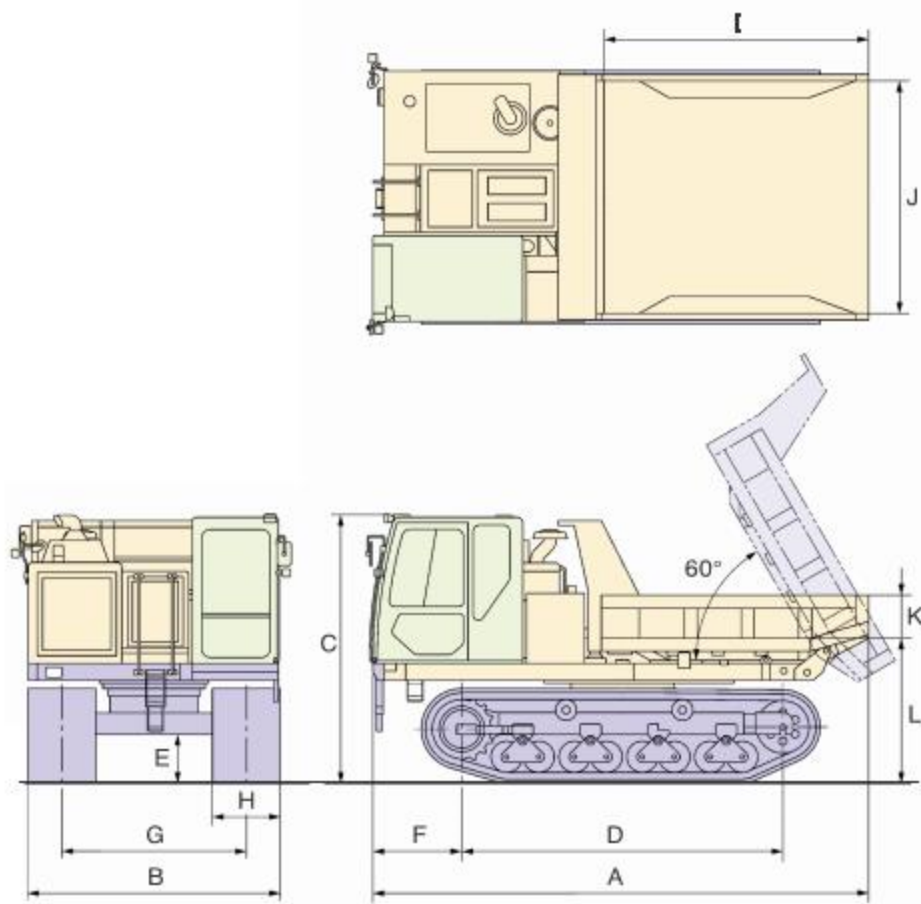

Two driving Lever



Rear Camera



Side Camera



Easy Control with HST drive system



360° rotation brings more security, less stress and fatigue to the driver

Model		MST-2200VDR										
PERFORMANCE				DUMP BODY				TANK CAPACITY				
Maximum Payload	Kg	11,000		Overall Length	l	mm	3,200		Fuel Tank	ℓ	300	
Loading Capacity	m ³	3.97		Overall Width	J	mm	2,750		Hydraulic Tank	ℓ	150	
Speed1 Low	Km/h	8.0		Overall Height	K	mm	550		Liquid cooling Tank	ℓ	26	
Speed2 High	Km/h	10.0		Ground Clearance	L	mm	1,670		DRIVE SYSTEM			
Ground Pressure(empty)	Kg/cm ²	0.26		ENGINE				HST				
Ground Pressure(full)	Kg/cm ²	0.44		Model	CAT C7.1 Tier 4 final Stage 4			GRADEABILITY				
MACHINE DIMENSION				Nominal Output/rpm	HP(kw)/rpm	249(186)/2,200		Fully loaded: 27% (15 degree) Continuous				
Machine Weight	Kg	16,000		Torque	N.m/min-1	1,214/1,400		OTHER				
Overall Length	A	mm	5,900	HYDRAULIC PUMP				Cabin (ROPS/FOPS) Air Conditionner Radio 360° Rotation Rear Camera Right Side Camera				
Overall Width	B	mm	2,980	Main Pump								
Overall Height	C	mm	3,280	Maximum oil flow	ℓ/min.	165						
Wheelbase	D	mm	3,840	Pilot pump								
Min. Ground Clearance	E	mm	580	Maximum oil flow	ℓ/min.	121.2+83.3						
Front Overhang	F	mm	1,100	HYDRAULIC MOTOR								
Crawler Distance	G	mm	2,180	Travel Motor								
Crawler Width	H	mm	800	2x variable displacement axial piston motors								
Crawler Size		mm	800x150x66	Swing Motor				1x axial piston motors				

MOROOKA EUROPE

Im Neugrund 14
64521 Gross-Gerau
Germany

Web: www.morookaeurope.com



Contact

MEERMANMACHINES |||| MEERMAN GROEP

Meerman Machines bv
Koggehaven 20
3133 LA Vlaardingen
Tel: +31(0)10-4350611
Email: info@meerman.nl
Web: www.meerman.nl